

Installation Instructions

Step 1: Remove the Hinged BBQ Cover from the box.




Step 2: With the BBQ removed from the Box/Cabinet flip the unit over so that it is sitting flat on the cooking plate. Ensure that the rear of the BBQ is hanging over the edge of the bench or table.



Step 4: Take off the 4 x S/S Escutcheon Support Bars.

Step 3: Remove the 16 x brass perimeter nuts using an 8mm socket and remove the 16 x S/S tooth washers.

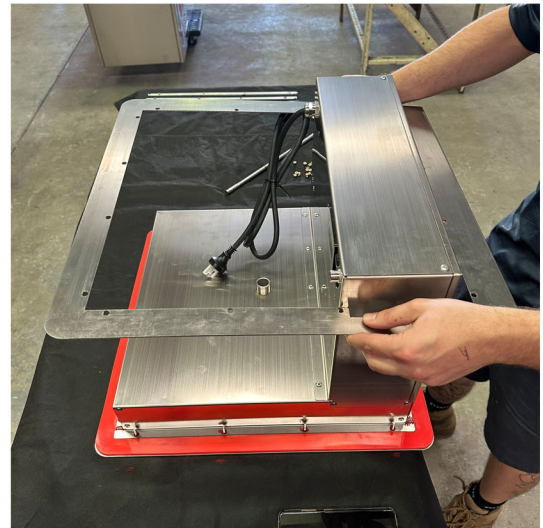

Step 5: Place the S/S support plate over the perimeter studs around the cooking plate. Make sure that the folded section of the support plate is facing to the rear of the BBQ with the fold facing downwards.


Installation Instructions




Step 6: Re install the 4 x S/S Escutcheon Support Bars, 16 x brass nuts and S/S tooth washers.



Step 7: Flip the BBQ unit over so that the plate is facing upwards.

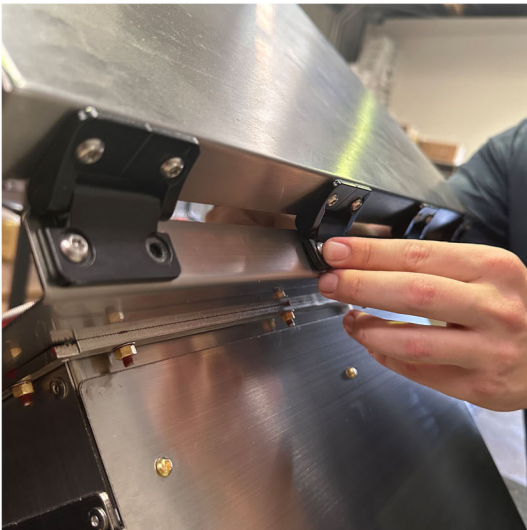

Step 8: Place the Hinged BBQ Cover over the BBQ plate and line up the holes on the black hinges with the holes in the fold of the S/S Support Plate. Insert the S/S Security Bolts and tighten the locking nuts using the tool supplied.

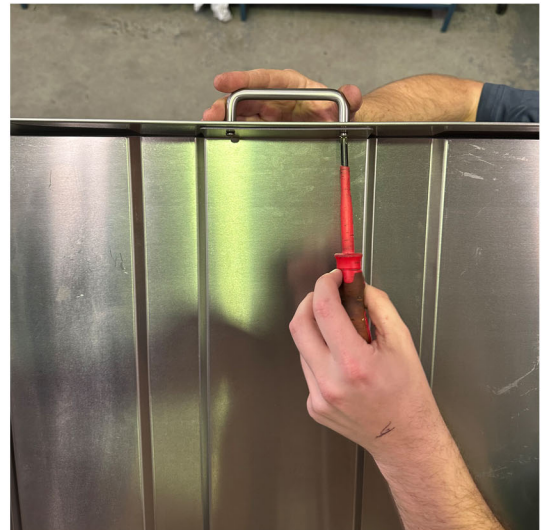

Step 9: Install the S/S Handle on the front of the lid by screwing the hardware supplied through the holes in the aluminium heat shield.